

"Lighting by Light Designers"



CONTENT PRODUCT CATALOG 2020

ENTERTAINMENT COLLECTION

- PAGE 8 → **PAR CANS**
- PAGE 16 → **MOVING HEADS**
- PAGE 24 → **PROFILES**
- PAGE 30 → **MOVING BARS**

ARCHITECTURE COLLECTION

- PAGE 36 → **WALL WASHER**

"Lighting by Light Designers" That's what you get when an award-winning lighting designer decides to build his own line, just because he couldn't find what it takes to get the job done at the right cost !

LUMINA PRO Design Philosophy

Providing a unique line of lighting products that adapts the latest technological developments available to the industry is our main goal.

Created for light technicians, touring and stage designers, entertainment specialists, interior designers and architects. We have to abide by efficiency in output and cost.

This is our mission.....This is our promise.

luminapro

We, at Syncrotek, believe only in perfection. Thus, our arsenal of experts includes award-winning electro-acoustic engineers, sound engineers, award-winning light designers, architects, creative designers, touring / events experts, world-class musicians, and system integration engineers. Only by such a wide spectrum of expertise, we reach our objectives of world-class audio/visual products and services that are out of this world.

syncrotek
H O L D I N G



ENTERTAINMENT

"**Lighting by Light Designers**" That's what you get when an award-winning lighting designer decides to build his own line, just because he couldn't find what it takes to get the job done at the right cost !

SL-1815

SUPER LED PAR

RGBWA+UV

FEATURES

- Light source: LEDs 12W 6in1 (RGBWA + UV / FC) x 18
- Superior color mixing / Great BlackLight effect / Dynamic White
- Flicker Free
- Beam angle: 25° (45° Optional)
- DMX 512 - Master/Slave - Sound -Auto
- DMX Channels 6 /10
- Built-in 32 Effects (Direct color / Colored strobe / Color changing)
- DMX In & Out :XLR Male 3Pin & 5Pin - Female 3pin & 5Pin
- Low Profile Die-cast aluminum body with double brackets
- AC Power: 90V -240V / 50Hz-60Hz /
- Power connectors: Powercon In - Out
- Power consumption: Max 270W
- Indoor Application -IP Rating 20
- Net Weight: 16.5 lbs (7 Kg)

PAR CANS



SL-1815 Front



SL-1815 Side



SL-1815 Back



Specifications are subject to change without prior notice

SL-915

SUPER LED PAR

RGBWA+UV

FEATURES

- Light source: LEDs 12W 6in1 (RGBWA + UV / FC) x 9
- Superior color mixing / Great BlackLight effect / Dynamic White
- Flicker Free
- Beam angle: 30° (45° Optional)
- DMX 512 - Master/Slave - Sound -Auto
- DMX Channels 6 /10
- Built-in 32 Effects (Direct color / Colored strobe / Color changing)
- DMX In & Out :XLR Male 3Pin & 5Pin - Female 3pin & 5Pin
- Low Profile Die-cast aluminum body with double brackets
- AC Power: 90V -240V / 50Hz-60Hz
- Power connectors: Powercon In - Out
- Power consumption: Max 135W
- Indoor Application -IP Rating 20
- Net Weight: 7.1 lbs (3.22 Kg)

PAR CANS



SL-915 Front



SL-915 Side



SL-915 Back



Specifications are subject to change without prior notice

P-18E

SLIM LED PAR

FEATURES

- Light source: 18 X 1W (6R - 6G - 6B)
- Beam angle: 30°
- DMX 512 - Master/Slave - Sound - Auto
- DMX In - DMX Out
- Built-in Program (Fixed color / Color changing/ Strobe)
- Low Profile Plastic body with double brackets
- AC Power: 90V -240V / 50Hz-60Hz
- Indoor Application -IP Rating 20
- Net Weight: 3.52 lbs (1.6 Kg)



P-18e Front



P-18e Side



P-18e Back



Specifications are subject to change without prior notice

PAR CANS

P-710

SLIM LED PAR

WITH REMOTE CONTROL

RGB

FEATURES

- Light source: Ultra Bright 7 X 10W 3in1 RGB/FC
- Beam angle: 40
- DMX 512 - Master/Slave - Sound - Auto
- DMX In - DMX Out
- 64 direct color select
- 16 Color changing mode
- 16 strobe mode
- 16 dimming mode
- Low Profile
- Light weight Plastic body with double brackets
- AC Power: 90V -240V / 50Hz-60Hz (Power In -Power Out)
- IR remote control (Sold separately)
- Net Weight: 2.42 lbs (1.1 Kg)

PAR CANS



P-710 Front



P-710 Side



P-710 Back



Specifications are subject to change without prior notice

SPYDER 400-BSW

Beam - Spot - Wash

FEATURES

- Light source: 420W long life
- Color temperature: 7800K (CTO 7500-3200K)
- Light output diameter: 138MM
- Zoom range: 2-40 degrees
- Control mode: DMX512, RDM (channel mode 18CH/22CH)
- Scanning: horizontal 540°, vertical 270°, precise positioning of motor magnetic coding
- Heat dissipation method: air-cooled die-cast magnesium alloy + radiator
- Color wheel: one color wheel, 11 colors plus white light
- Low profile die-cast aluminum body with double brackets
- Effect plate: can flow water back & forth
- AC power: 100V - 240V / 50Hz-60Hz
- Shell: full die-cast magnesium alloy material
- Power consumption : 600w
- IP rating: IP66
- Net weight: 493.8 lbs (24 Kg)



SPYDER 400-BSW Front



SPYDER 400-BSW Side



SPYDER 400-BSW Side



Specifications are subject to change without prior notice

SPYDER 1940-IP

Wash LED RGBW

FEATURES

- Light source: LED 40W 4 in 1 RGBW / FC x 19
- Electronic zoom: 5° - 55°
- Superior color mixing (Flicker free)
- Dynamic white: 2700K - 8000K
- Control mode: DMX512, master / slave - sound - auto
- DMX channels: 23 / 25 / 101
- DMX connectors in & out: female 3 pin - male 3 pin
- Lens rotation angle: 360°
- Low profile plastic body
- Pan: 540° - Tilt 270°
- AC power: 90V - 240V / 50Hz-60Hz
- Body color: black
- Power consumption: 1200W max
- IP rating: IP65 (indoor / outdoor)
- Net weight: 48.5 lbs (22 Kg)

MOVING HEADS



SPYDER 1940-IP Front



SPYDER 1940-IP Side



SPYDER 1940-IP Back



Specifications are subject to change without prior notice

SPYDER M200

Beam - Spot - Wash

FEATURES

- Light source: Philips Platinum 5R 189w
- Illuminance: 78000 Lux @ 15 m
- Colors: 14 + White, continuous scroll at variable speeds
- Gobos: 17 + Open, continuous scroll at variable speeds
- Beam angle from 0 to 3.8°
- Prism: 8 Facet rotate-able
- Focus: Electronic - Frost filter for wash effect
- DMX 512 - Master/Slave - Sound - Auto
- 16 DMX channels
- Pan: 540° - Tilt: 270°
- Body color: Black - Low Profile body
- DMX connectors In & Out: XLRs Female 3pin & 5pin - Male 3pin & 5pin
- AC Power: 90V -240V / 50Hz-60Hz - Power consumption : 360 W Max
- Indoor Application -IP Rating 20 - Net Weight: 42.1 lbs (19.1 KG)



SPYDER M200 Front



SPYDER M200 Side



SPYDER M200 Back



Specifications are subject to change without prior notice

MOVING HEADS

SPYDER 1915-Z

MOVING HEAD WASH LED

RGBW

FEATURES

- Light source: LED 15W 4in1 RGBW / FC x 19
 - Elctonic zoom 5°-60°
 - Superior color mixing
 - Dynamic White: 2700K - 8000K
 - Flicker free
 - DMX 512 - Master/Slave - Sound - Auto
 - 10/13 DMX channels
 - Pan: 540° - Tilt: 270°
 - Low Profile plastic body
 - Body color: Black
 - DMX connectors In & Out: Female 3pin - Male 3pin
 - AC Power: 90V -240V / 50Hz-60Hz
 - Power consumption : 300 W Max
 - Indoor Application -IP Rating 20
- Net Weight: 18.08 lbs (8.2 KG)

MOVING HEADS



SPYDER 1915-Z



SPYDER 1915-Z

Specifications are subject to change without prior notice

Viper P-200 WW SUPER LED PROFILE

FEATURES

- Warm white light with superior light quality
- Light source: 180W COB
- CRI (Color Rendering Index): ≥ 95
- CCT (Correlated Color Temperature) : 3200K
- Illuminance: 35000 LUX @ 1 meter (19°)
- Lens: 19° (Standard) - 26° (Optional) - 36° (Optional)
- Electronic Dimmer - Strobe
- Manual Focus
- 2 Channel DMX
- LED Display
- DMX In & Out :XLR Male 3Pin - Female 3pin
- AC Power: 90V -240V / 50Hz-60Hz
- Power consumption: Max 200W
- Indoor Application -IP Rating 20
- Weight: 16.42 lbs (7.45 kg)

PROFILES



Viper P-200 WW



Viper P-200 WW



Viper P-200 WW



SOUL OF SIMPLICITY

Specifications are subject to change without prior notice


Viper P-150

LED PROFILE

RGB

FEATURES

- Light source: 120W COB RGB/FC
- Illuminance: 1800 LUX @ 5 meter (19°)
- Lens: 19° (Standard) - 26° - 36° - 50° (Optional)
- Electronic Dimmer 4 selectable dimming curves- Strobe
- Manual Focus
- 8 Channel DMX
- LED Display
- DMX In & Out :XLRs Male 3Pin - Female 3pin
- Power connectors: Powercon In & Out
- AC Power: 90V -240V / 50Hz-60Hz
- Power consumption: Max 150W
- Indoor Application -IP Rating 20
- Weight: 17.92 lbs (8.15 kg)

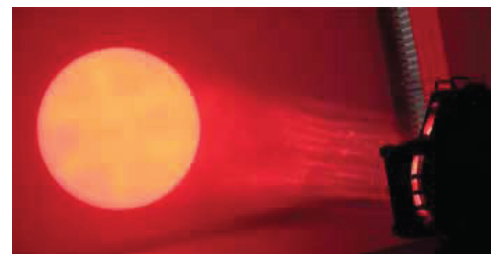

Viper P-150



Viper P-150



Viper P-150



Specifications are subject to change without prior notice

PROFILES

Viper P-150

LED PROFILE

WW

FEATURES

- Light source: 120W COB
- CRI (Color Rendering Index) : ≥ 78
- CCT (Correlated Color Temperature) : 3200K
- Illuminance: 1800 LUX @ 5 meter (19°)
- Lens: 19° (Standard) - 26° - 36° - 50° (Optional)
- Electronic Dimmer 4 selectable dimming curves- Strobe
- Manual Focus
- 3 Channel DMX
- LED Display
- DMX In & Out :XLRs Male 3Pin - Female 3pin
- Power connectors: Powercon In & Out
- AC Power: 90V -240V / 50Hz-60Hz
- Power consumption: Max 150W
- Indoor Application -IP Rating 20
- Weight: 17.92 lbs (8.15 kg)



Viper P-150



Viper P-150



Viper P-150



Specifications are subject to change without prior notice

PROFILES

XBW-810

8 Beam Sweeper Bar

FEATURES

- Light source: LUMINUS LED 10W (White) x 8
- Beam angle: 3°
- DMX 512
- Built-in effects
- 270 degree tilt from smooth Stepper Motors
- Electronic Dimming: 0 -100%
- AC Power: 90-240 Volt
- Net Weight: 12.56 lbs (5.7 kg)



XBW-810

MOVING BARS

Specifications are subject to change without prior notice

XBC-810

8 Beam Sweeper Bar

FEATURES

- Light source: LED 10W
- RGBW x 8
- Beam angle: 3°
- DMX 512
- Built-in effects
- 270 degree tilt from smooth Stepper Motors
- Electronic Dimming: 0 -100%
- AC Power: 90-240 Volt
- Net Weight: 12.56 lbs (5.7 kg)



XBC-810

MOVING BARS

Specifications are subject to change without prior notice

ARCHITECTURE

"Lighting by Light Designers" That's what you get when an award-winning lighting designer decides to build his own line, just because he couldn't find what it takes to get the job done at the right cost !

Chameleon XL-1200

SUPER LED PAR

RGBW

FEATURES

- Light source: High output 8W 4in1 (RGBW / FC) x 120
- Superior color mixing
- Flicker free
- Beam angle: 25Upper unit - 45Lower unit, Options (25-25 & 45-45)
- DMX 512 - Master/Slave - Sound -Auto
- Electronic dimming 0-100%
- 4-5-7 DMX channels
- Built-in Effects (Colored strobe 0-100% & Color changing fade time 0-100%)
- Die-cast aluminum body - Body color: Black
- DMX connectors IP rated Female 3pin & Male 3pin
- Power connectors IP rated Power In and Out
- AC Power: 90V -240V / 50Hz-60Hz
- power consumption : 12000w - Out65
- Net Weight: 65.70 lbs (29.80 Kg)
- Flight case Optional

WALL WASHER



Chameleon XL-1200



Chameleon XL-1200



Chameleon XL-1200



Specifications are subject to change without prior notice

Chameleon PW-600

RGBW

FEATURES

- Light source: cree High output 12W 4in1 (RGBW / FC) x 44
- Superior color mixing
- Flicker free
- Beam angle: 25° Options (15°, 40°, & 60°)
- DMX 512 - Master/Slave - Sound -Auto
- Electronic dimming 0-100%
- 4-10 DMX channels
- Die-cast aluminum body
- Body color: Black & Grey
- DMX connectors: IP rated Female 3pin & Male 3pin
- Power connectors: IP rated Power In and Out
- AC Power: 90V -240V / 50Hz-60Hz
- Power consumption : 600w
- Outdoor applications: IP Rating 65
- Dimensions: 20.47" x 9.25" x 12.2" - 52 x 23.5 x 31cm
- Net Weight: 26.45 lbs (12 Kg)

WALL WASHER



Chameleon PW-600



Chameleon PW-600



Specifications are subject to change without prior notice

Chameleon 1808

RGBA

FEATURES

- Light source: High output 8W 4in1 (RGBA / FC) x 18
- Superior color mixing
- Flicker free
- Beam angle: 25° (45Optional)
- DMX 512 - Master/Slave - Sound -Auto
- Electronic dimming 0-100%
- 4-5-7 DMX channels
- Built-in Effects (Colored strobe 0-100% & Color changing fade time 0-100%)
- Die-cast aluminum body
- Body color: Available in Black or White (Custom colors available*)
- DMX connectors IP rated Female 3pin & Male 3pin
- Power connectors IP rated Power In and Out
- AC Power: 90V -240V / 50Hz-60Hz - Out65
- Net Weight: 15.68 lbs (7.11 Kg)

WALL WASHER



Chameleon 1808



Chameleon 1808



Chameleon 1808



Specifications are subject to change without prior notice

Chameleon 54

RGBW

FEATURES

- Light source: 54 Cree LEDs, (3W Red x 12 -3W Green x 12 - 3W Blue x 12 - 3W White x 12)
- Superior color mixing
- Flicker Free
- Beam angle: 25° Options (12°)
- DMX 512 - Master/Slave - Auto
- Electronic dimming 0-100%
- 4,5,6, or 8 DMX channels
- Die-cast aluminum body
- Body color: Grey or custom
- DMX connectors: IP rated Female 3pin & Male 3pin
- Power connectors: IP rated Power In and Out
- AC Power: 90V -240V / 50Hz-60Hz
- Power consumption : 200w
- Outdoor applications: IP Rating 67
- Dimensions: 9.84" x 8.66" x 11.81" - 25 x 22 x 30 cm
- Net Weight: 12.125 lbs (5.5kg)

WALL WASHER



Chameleon 54



Chameleon 54

Specifications are subject to change without prior notice

SOUL OF SIMPLICITY

Chameleon MW-712

RGBW

FEATURES

- Light source: High output 12W 4in1 (RGBW / FC) x 7
- Superior color mixing
- Flicker free
- Beam angle: 25° Options (15°, 40°,& 60°)
- DMX 512 - Master/Slave - Sound -Auto
- Electronic dimming 0-100%
- 4-5-6-8 DMX channels
- Die-cast aluminum body
- Body color: Black
- DMX connectors: IP rated Female 3pin & Male 3pin
- Power connectors: IP rated Power In and Out
- AC Power: 90V -240V / 50Hz-60Hz
- Power consumption : 120w
- Outdoor applications: IP Rating 65
- Dimensions: 8.86" x 6.50" x 7.87" - 22.5x 16.5x 20cm
- Net Weight: 6.17 lbs (2.8 Kg)

WALL WASHER



Chameleon MW-712



Chameleon MW-712



Specifications are subject to change without prior notice

Chameleon MW-412

RGBW

FEATURES

- Light source: High output 12W 4in1 (RGBW / FC) x 4
- Superior color mixing
- Flicker free
- Beam angle: 25° Options (15°, 40°, & 60°)
- DMX 512 - Master/Slave - Sound -Auto
- Electronic dimming 0-100%
- 4,5,6, or 8 DMX channels
- Die-cast aluminum body
- Body color: Black
- DMX connectors: IP rated Female 3pin & Male 3pin
- Power connectors: IP rated Power In and Out
- AC Power: 90V-240V / 50Hz-60Hz
- Power consumption : 100w
- Outdoor applications: IP Rating 65
- Dimensions: 8.86" x 6.50" x 7.87" - 22.5x 16.5x 20cm
- Net Weight: 6.17 lbs (2.8 Kg)

WALL WASHER



Chameleon MW-412



Chameleon MW-412



Specifications are subject to change without prior notice

Chameleon MW-1812

RGBW

FEATURES

- Light source: High output 12W 4in1 (RGBW / FC) x 18
- Superior color mixing
- Flicker free
- Beam angle: 25° Options (15°, 40°,& 60°)
- DMX 512 - Master/Slave - Sound -Auto
- Electronic dimming 0-100%
- 4,5,6, or 8 DMX channels
- Die-cast aluminum body
- Body color: Black
- DMX connectors: IP rated Female 3pin & Male 3pin
- Power connectors: IP rated Power In and Out
- AC Power: 90V -240V / 50Hz-60Hz
- Power consumption : 250W
- Outdoor applications: IP Rating 65
- Dimensions: 13.85" x 10.43" x 11.22" - 34.5 x 26.5 x 28.5 cm
- Net Weight: 15.21 lbs (6.9 Kg)

WALL WASHER



Chameleon MW-1812



Chameleon MW-1812



Specifications are subject to change without prior notice

POLARIS1000

Multi-effect wall washer

FEATURES

- Light source: 25LED 5W 4in1 RGBW / FC
- Superior color mixing
- Flicker free
- Beam angle: 80°
- Northern Light
- Water & Fire effects ect,
- DMX connectors In & Out: Female 3pin - Male 3pin
- AC Power: 90V -240V / 50Hz-60Hz
- Power consumption : 200 W Max
- Outdoor Application : IP Rating 65
- Net Weight: 18.50 lbs (8.4 KG)

WALL WASHER



POLARIS1000



POLARIS1000



POLARIS1000



POLARIS1000

Specifications are subject to change without prior notice

L1810

L1810-DM

Multi Purpose Wall-Washer

FEATURES

- Light source: 18 LED 10W 4in1 RGBW / FC
- Superior color mixing
- Flicker free
- Beam angle: 25° - 45° (Optional)
- Dot Matrix Control (L1810-DM)
- DMX 512 - Master/Slave - Sound - Auto
- 4/5/7 DMX channels - 4/7/24/75 (L1810-DM)
- Low Profile Die-Cast Aluminum body, Length 39.37" - 100CM
- Body color: Black - White (Optional)
- DMX connectors In & Out: Female 3pin - Male 3pin
- AC Power: 90V -240V / 50Hz-60Hz
- Power consumption : 200 W Max
- Outdoor Application : IP Rating 65
- Net Weight: 22.27 lbs (10.1 KG)

WALL WASHER



L1810-DM



L1810-DM



L1810-DM

Specifications are subject to change without prior notice

L1212

L1212-DM

FEATURES

- Light source: 12 LED 12W 5in1 RGBAW / FC
- Superior color mixing
- Flicker free
- Beam angle: 25° - 45° (Optional)
- Dot Matrix Control (L1212-DM)
- DMX 512 - Master/Slave - Sound - Auto
- 5/9 DMX channels - 9/24/60 (L1212-DM)
- Low Profile metal body, Length 26" - 66CM
- Body color: Black - White (Optional)
- DMX connectors In & Out: Female 3pin - Male 3pin
- AC Power: 90V -240V / 50Hz-60Hz
- Power consumption : 200 W Max
- Indoor Application -IP Rating 20
- Net Weight: 13.66 lbs (6.2 KG)

WALL WASHER



L1212-DM

Specifications are subject to change without prior notice

lumina[®]pro

Solutions by Syncrotek:

Waveburg
CUSTOM ACOUSTIC DESIGN **PRO**

www.waveburg.com

NOX AUDIO

www.noxaudio.com

lumina[®]pro

www.lumina-pro.com

ITA
MAGIC IN THE AIR

www.magicintheair.us

WCAD

www.wcad.ca



■ 5407 Bandera Rd, Ste. 111, San Antonio, TX 78238, USA

■ Phone: +1 (210) 251 4767

■ info@syncrotek.com

■ www.syncrotek.com

WWW.LUMINA-PRO.COM



syncrotekholding